



DATA  
SHEET



SYSTEMS

**GTM**



**greentechno**

ULTRASONIC  
CLEANING SYSTEMS

REF.  
09



MODEL

**GTM-16**

CUBIC  
CAPACITY

**160 litres**

ULTRASONIC  
FREQUENCY

**40Khz**


RECOMMENDED  
DETERGENT

**ecoclean**

SWEEP  
SYSTEM


**SSX3**

EXTERNAL  
DIMENSIONS



L: 1100 mm  
W: 930 mm  
H: 920 mm

WORKING  
DIMENSIONS



L: 680 mm  
W: 500 mm  
H: 350 mm

DESCRIPTION

- Manual loading
- 1500 W of ultrasonic power
- 4500 W of heating power
- 380 Vac

TECHNICAL FEATURES

- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Manual platform.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



REF.  
10



MODEL

**GTM-31**

CUBIC  
CAPACITY

**310 litres**

ULTRASONIC  
FREQUENCY

**40Khz**

RECOMMENDED  
DETERGENT

**ecoclean**

SWEEP  
SYSTEM


**SSX3**

EXTERNAL  
DIMENSIONS



L: 1350 mm  
W: 1080 mm  
H: 950 mm

WORKING  
DIMENSIONS



L: 900 mm  
W: 650 mm  
H: 390 mm

DESCRIPTION

- Manual loading
- 3000 W of ultrasonic power
- 6000 W of heating power
- 380 Vac

TECHNICAL FEATURES

- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Manual platform.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.


Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



REF.  
11

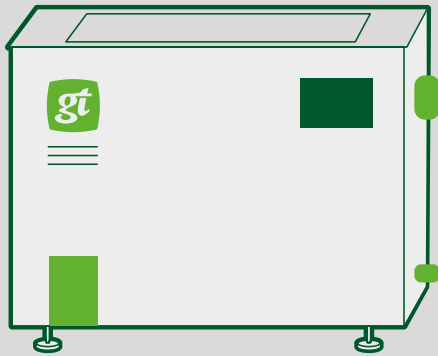

MODEL

**GTM-42**

CUBIC  
CAPACITY

**420 litres**

ULTRASONIC  
FREQUENCY

**40Khz**


RECOMMENDED  
DETERGENT

**ecoclean**

SWEEP  
SYSTEM


**SSX3**

EXTERNAL  
DIMENSIONS



L: 1530 mm  
W: 1130 mm  
H: 1000 mm

WORKING  
DIMENSIONS



L: 1050 mm  
W: 700 mm  
H: 440 mm

DESCRIPTION

- Manual loading
- 4500 W of ultrasonic power
- 7500 W of heating power
- 380 Vac

TECHNICAL FEATURES

- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Manual platform.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.


Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



REF.  
12

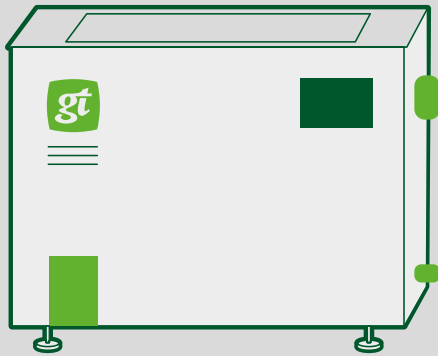

MODEL

**GTM-60**

CUBIC  
CAPACITY

**600 litres**

ULTRASONIC  
FREQUENCY

**40Khz**

RECOMMENDED  
DETERGENT

**ecoclean**

SWEEP  
SYSTEM


**SSX3**

EXTERNAL  
DIMENSIONS



L: 1680 mm  
W: 1180 mm  
H: 1100 mm

WORKING  
DIMENSIONS



L: 1200 mm  
W: 750 mm  
H: 540 mm

DESCRIPTION

- Manual loading
- 6000 W of ultrasonic power
- 9000 W of heating power
- 380 Vac

TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Manual platform.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



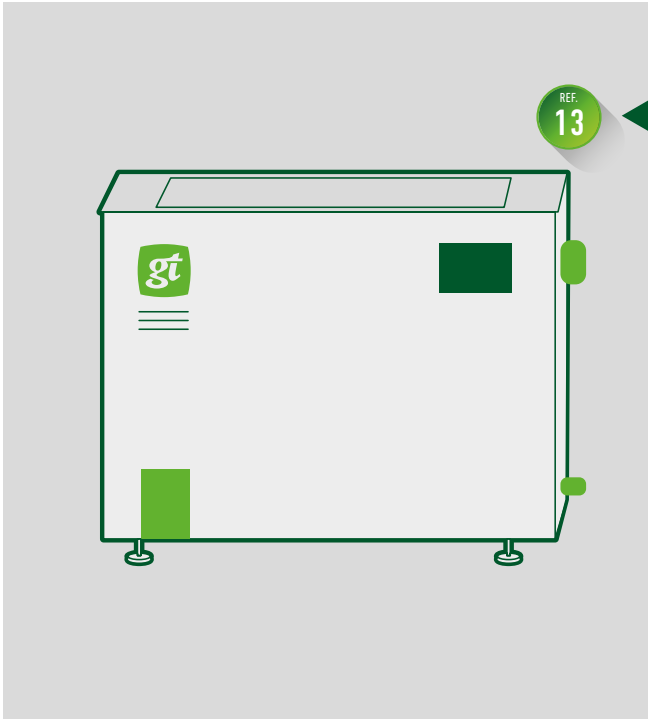


MODEL  
**GTM-94**


CUBIC CAPACITY  
**940 litres**

ULTRASONIC FREQUENCY  
**40Khz**

RECOMMENDED DETERGENT  
**ecoclean**

SWEEP SYSTEM  
**SSX3**

EXTERNAL DIMENSIONS  

 L: 1930 mm  
 W: 1320 mm  
 H: 1200 mm

WORKING DIMENSIONS  

 L: 1450 mm  
 W: 850 mm  
 H: 640 mm

DESCRIPTION

- Manual loading
- 7500 W of ultrasonic power
- 12000 W of heating power
- 380 Vac

TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Manual platform.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
 P-203. 39792 Heras.  
 Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
 www.greentechnosl.com



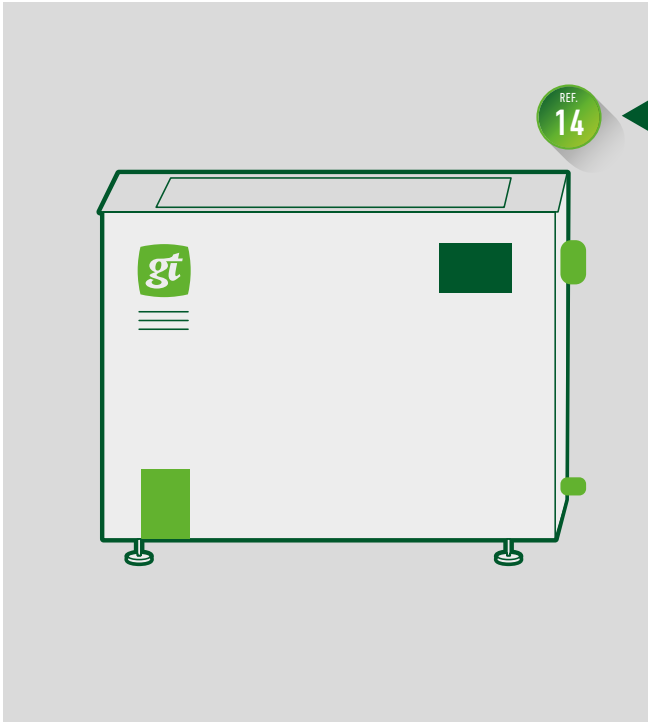

<b>MODEL</b> <h1>GTM-150</h1>	
<b>CUBIC CAPACITY</b> <h2>1500 litres</h2>	<b>ULTRASONIC FREQUENCY</b> <h2>40Khz</h2>
<b>RECOMMENDED DETERGENT</b> 	<b>SWEEP SYSTEM</b> <h2>SSX3</h2>
<b>EXTERNAL DIMENSIONS</b> <p>L: 2130 mm W: 1520 mm H: 1400 mm</p>	<b>WORKING DIMENSIONS</b> <p>L: 1650 mm W: 1050 mm H: 840 mm</p>

### DESCRIPTION

- Manual loading
- 12000 W of ultrasonic power
- 15000 W of heating power
- 380 Vac

### TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Manual platform.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



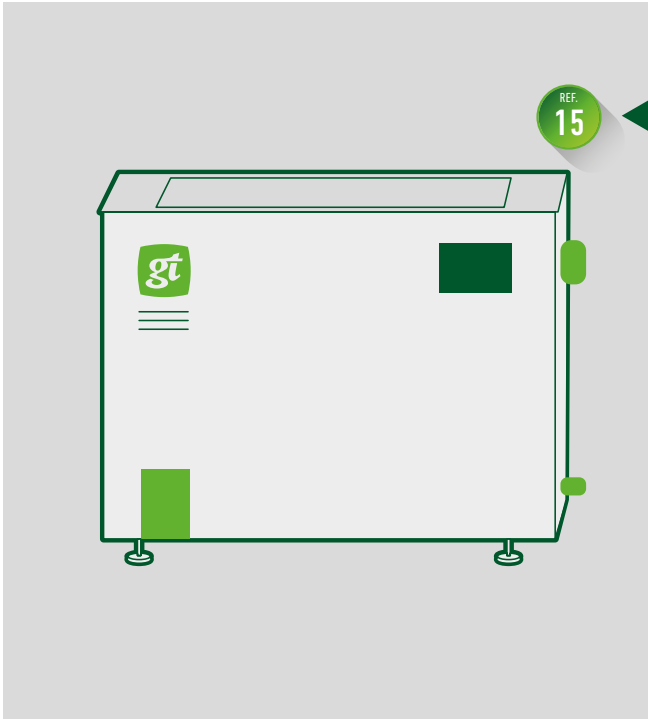


MODEL  
**GTM-400**


CUBIC CAPACITY  
**4000 litres**

ULTRASONIC FREQUENCY  
**40Khz**

RECOMMENDED DETERGENT  
**ecoclean**

SWEEP SYSTEM  
**SSX3**

EXTERNAL DIMENSIONS  

 L: 2980 mm  
 W: 1950 mm  
 H: 1600 mm

WORKING DIMENSIONS  

 L: 2500 mm  
 W: 1450 mm  
 H: 1040 mm

DESCRIPTION

- Manual loading
- 24000 W of ultrasonic power
- 18000 W of heating power
- 380 Vac

TECHNICAL FEATURES

- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Manual platform.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
 P-203. 39792 Heras.  
 Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
 www.greentechnosl.com

