

DATA  
SHEET




SYSTEMS

**GTS**



**greentechno**

ULTRASONIC  
CLEANING SYSTEMS

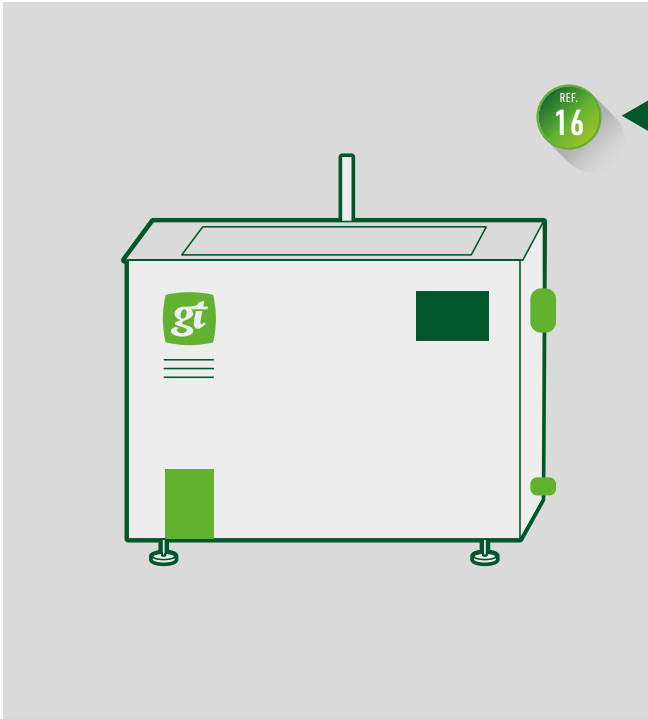

<b>MODEL</b> <h1>GTS-16</h1>	
<b>CUBIC CAPACITY</b> <h2>160 litres</h2>	<b>ULTRASONIC FREQUENCY</b> <h2>40Khz</h2>
<b>RECOMMENDED DETERGENT</b> 	<b>SWEEP SYSTEM</b> <h2>SSX3</h2>
<b>EXTERNAL DIMENSIONS</b> <p>L: 1100 mm W: 930 mm H: 920 mm</p>	<b>WORKING DIMENSIONS</b> <p>L: 680 mm W: 440 mm H: 350 mm</p>

### DESCRIPTION

- Pneumatic lift
- Load capacity: up to 100 kg
- 1500 W of ultrasonic power
- 4500 W of heating power
- 380 Vac

### TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Pneumatic lift with up-down option.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Integrated air pistol.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



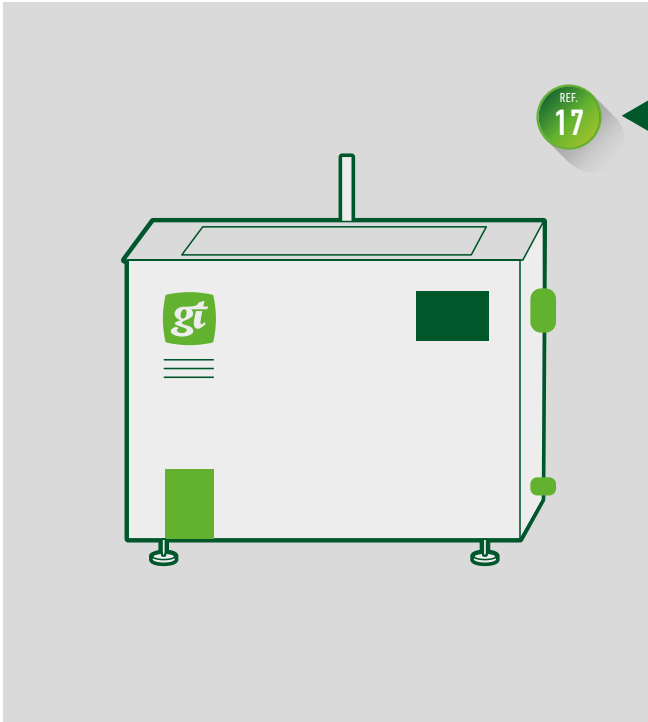

<b>MODEL</b> <h1>GTS-31</h1>	
<b>CUBIC CAPACITY</b> <h2>310 litres</h2>	<b>ULTRASONIC FREQUENCY</b> <h2>40Khz</h2>
<b>RECOMMENDED DETERGENT</b> 	<b>SWEEP SYSTEM</b> <h2>SSX3</h2>
<b>EXTERNAL DIMENSIONS</b> <p>L: 1350 mm W: 1080 mm H: 950 mm</p>	<b>WORKING DIMENSIONS</b> <p>L: 930 mm W: 560 mm H: 390 mm</p>

### DESCRIPTION

- Pneumatic lift
- Load capacity: up to 220 kg
- 3000 W of ultrasonic power
- 6000 W of heating power
- 380 Vac

### TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Pneumatic lift with up-down option.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Integrated air pistol.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



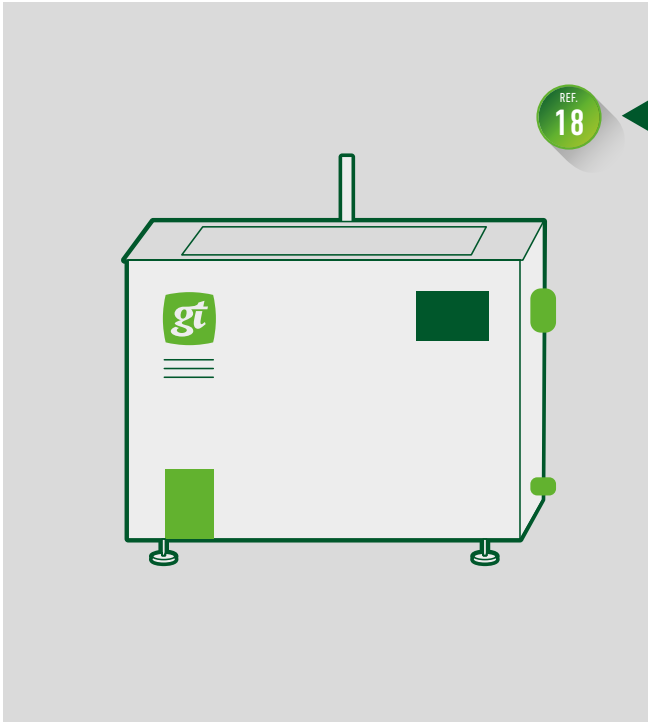

<b>MODEL</b> <h1>GTS-42</h1>	
<b>CUBIC CAPACITY</b> <h2>420 litres</h2>	<b>ULTRASONIC FREQUENCY</b> <h2>40Khz</h2>
<b>RECOMMENDED DETERGENT</b> 	<b>SWEEP SYSTEM</b> <h2>SSX3</h2>
<b>EXTERNAL DIMENSIONS</b> <p>L: 1530 mm W: 1130 mm H: 1000 mm</p>	<b>WORKING DIMENSIONS</b> <p>L: 1080 mm W: 610 mm H: 440 mm</p>

### DESCRIPTION

- Pneumatic lift
- Load capacity: up to 320 kg
- 4500 W of ultrasonic power
- 7500 W of heating power
- 380 Vac

### TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Pneumatic lift with up-down option.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Integrated air pistol.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



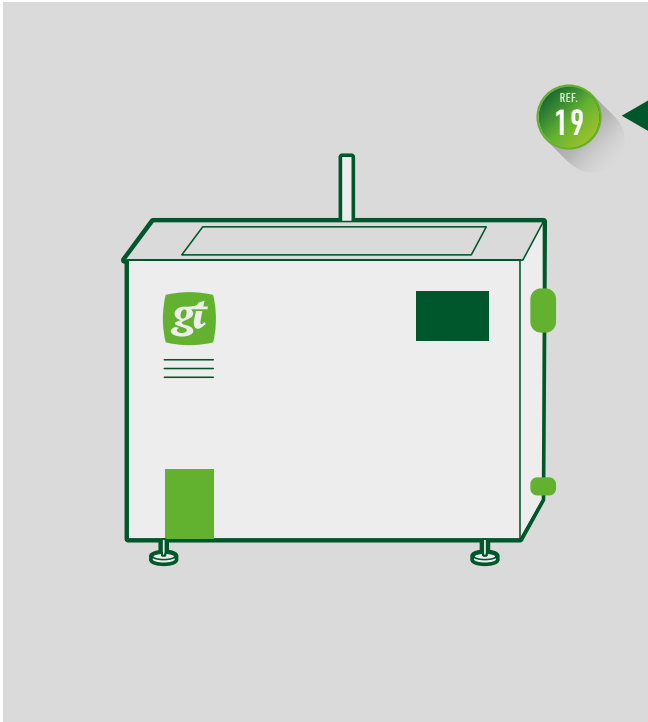


MODEL  
**GTS-60**


CUBIC CAPACITY  
**600 litres**

ULTRASONIC FREQUENCY  
**40Khz**

RECOMMENDED DETERGENT  
**ecoclean**

SWEEP SYSTEM  
**SSX3**

EXTERNAL DIMENSIONS  

 L: 1680 mm  
 W: 1180 mm  
 H: 1100 mm

WORKING DIMENSIONS  

 L: 1230 mm  
 W: 660 mm  
 H: 540 mm

DESCRIPTION

- Pneumatic lift
- Load capacity: up to 450 kg
- 6000 W of ultrasonic power
- 9000 W of heating power
- 380 Vac

TECHNICAL FEATURES

- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Pneumatic lift with up-down option.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Integrated air pistol.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.


Políg. Industrial de Heras.  
 P-203. 39792 Heras.  
 Cantabria. Spain.



T. (+34) 942 544 604

info@greentechnosl.com  
 www.greentechnosl.com



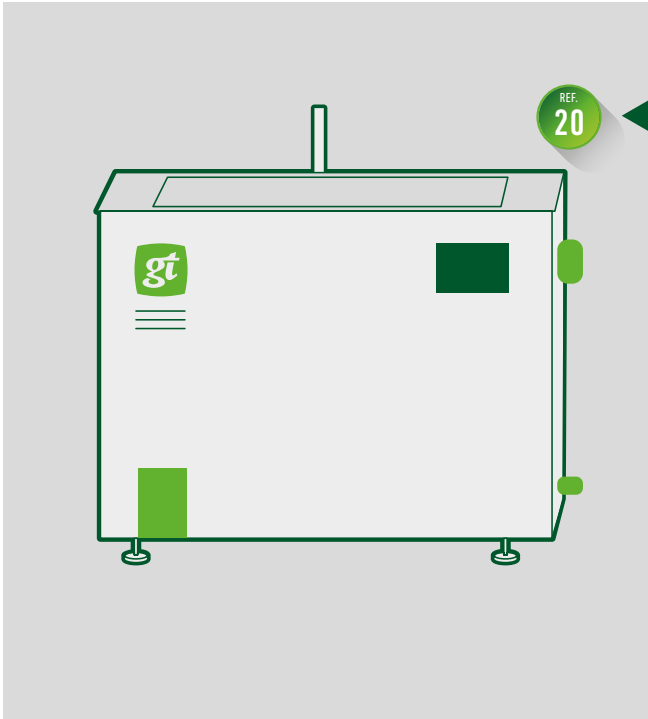

<b>MODEL</b> <h1>GTS-94</h1>	
<b>CUBIC CAPACITY</b> <h2>940 litres</h2>	<b>ULTRASONIC FREQUENCY</b> <h2>40Khz</h2>
<b>RECOMMENDED DETERGENT</b> 	<b>SWEEP SYSTEM</b> <h2>SSX3</h2>
<b>EXTERNAL DIMENSIONS</b> <p>L: 1930 mm W: 1320 mm H: 1200 mm</p>	<b>WORKING DIMENSIONS</b> <p>L: 1480 mm W: 760 mm H: 640 mm</p>

### DESCRIPTION

- Pneumatic lift
- Load capacity: up to 450 kg
- 6000 W of ultrasonic power
- 9000 W of heating power
- 380 Vac

### TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Pneumatic lift with up-down option.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Integrated air pistol.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



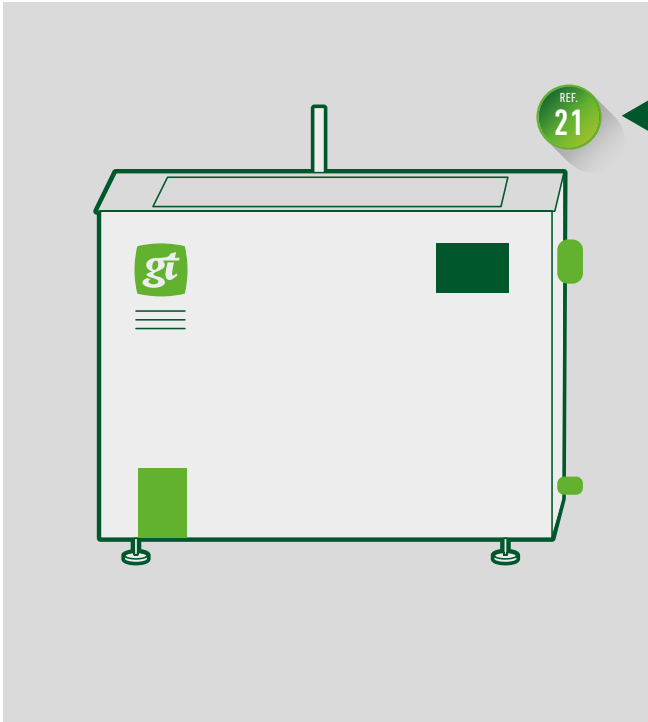

<b>MODEL</b> <h1>GTS-150</h1>	
<b>CUBIC CAPACITY</b> <h2>1500 litres</h2>	<b>ULTRASONIC FREQUENCY</b> <h2>40Khz</h2>
<b>RECOMMENDED DETERGENT</b> 	<b>SWEEP SYSTEM</b> <h2>SSX3</h2>
<b>EXTERNAL DIMENSIONS</b> <p>L: 2130 mm W: 1520 mm H: 1400 mm</p>	<b>WORKING DIMENSIONS</b> <p>L: 1680 mm W: 960 mm H: 840 mm</p>

### DESCRIPTION

- Pneumatic lift
- Load capacity: up to 1000 kg
- 12000 W of ultrasonic power
- 15000 W of heating power
- 380 Vac

### TECHNICAL FEATURES


- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Pneumatic lift with up-down option.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Integrated air pistol.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
P-203. 39792 Heras.  
Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
www.greentechnosl.com



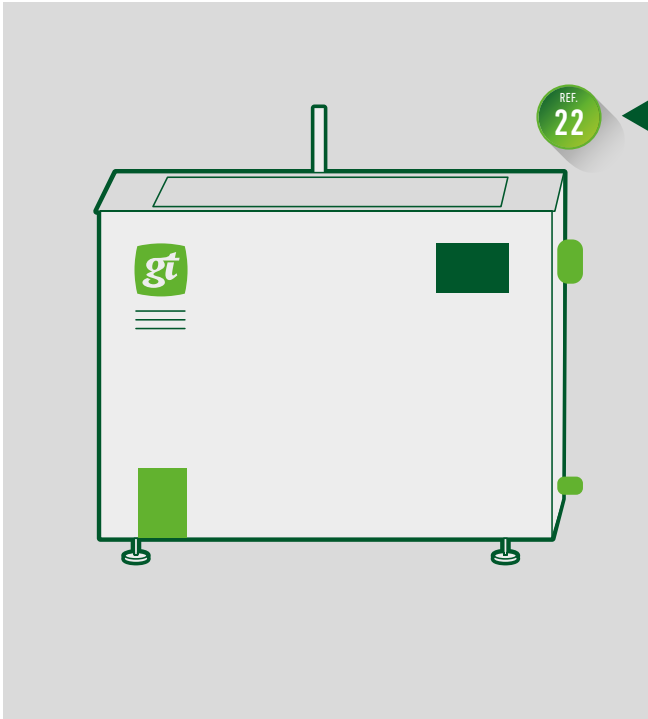


MODEL  
**GTS-400**


CUBIC CAPACITY  
**4000 litres**

ULTRASONIC FREQUENCY  
**40Khz**

RECOMMENDED DETERGENT  
**ecoclean**

SWEEP SYSTEM  
**SSX3**

EXTERNAL DIMENSIONS  

 L: 2980 mm  
 W: 1950 mm  
 H: 1600 mm

WORKING DIMENSIONS  

 L: 2530 mm  
 W: 1360 mm  
 H: 1040 mm

DESCRIPTION

- Pneumatic lift
- Load capacity: up to 1500 kg
- 24000 W of ultrasonic power
- 18000 W of heating power
- 380 Vac

TECHNICAL FEATURES

- 7" tactile and intuitive control screen.
- Independent config. for each function.
- Auto-start function.
- Pneumatic lift with up-down option.
- End of shift lid with thermal insulation.
- Drip tray.
- Overheating control system.
- Surface side sweep.
- Auxiliary tank for grease collection.
- Filtering system.
- Liquid level sensor.
- Integrated air pistol.
- Made from 304 and 316L stainless steel.
- Thermal insulation.
- Anti-vibration and adjustable feet.

Políg. Industrial de Heras.  
 P-203. 39792 Heras.  
 Cantabria. Spain.

T. (+34) 942 544 604

info@greentechnosl.com  
 www.greentechnosl.com

